

# TR3600WPR Exterior PeriOptic Lens Camera



## CLEAR THE VEHICLE'S RIGHT SIDE DURING A RIGHT TURN

The TR3600WPR is an exterior right turn camera with a PeriOptic 3600 Lens, a 73.7 degree field of view and a 90 degree adjustable viewing angle that is optimized to provide sharp, bright pictures during a right turn.

## DURABLE, RELIABLE EXTERIOR SURVEILLANCE

The TR3600WPR exterior camera sets a new standard for exterior surveillance system performance, featuring a shatter resistant glass lens cover that eliminates water and moisture buildup in the optic area and a stamped metal, waterproof and vandal-proof cast housing to protect your investment from the most extreme mobile conditions. Mounted on the front passenger side exterior of the vehicle, the TR3600WPR camera provides a crystal-clear view of the right side.

### DIMENSIONS & WEIGHT

- Lens Size: 3.6 millimeters
- Width: 3 inches
- Height: 2.5 inches
- Depth: 2 inches
- Weight: 160 grams

### IMAGE CAPTURE & RESOLUTION

- 520TV lines of resolution
- Effective picture elements:  
NTSC 768\*492/PAL 752\*582 (H\*V)
- AGC: ON
- S/N ratio: >48dB (AGC off)
- Light sensitivity: 0.5Lux f1.2

### OPERATIONAL SPECIFICATIONS

- Operational temperature: -10°C ~ +55°C
- Storage temperature: -20°C ~ +70°C

### CAMERA SPECIFICATIONS


- 1/3" Sony CCD image sensor
- 3.6mm PeriOptic Lens
- Internal synchronization
- 0.45 gamma correction
- Electronic iris: 1/60~1/100,000 (NTSC);  
1/50~1/100,000 (PAL)
- Automated white balance
- Video Out: 1.0 Vp-p, 750hm

### POWER & CURRENT CONSUMPTION

- Current consumption: 110mA @DC12V  
(less than 200mA @ IR ON)
- DC12V (10V ~ 16V) power supply  
(input voltage)

### CAMERA FEATURES

- High image quality with 1/3" Sony CCD Imager
- 3.6mm PeriOptic high dynamic lens
- Working low light - can work in less than 0.5Lux f1.2
- Wide voltage range - 10V ~ 16V
- Low power consumption (90mA @ DC12V) to extend camera lifespan
- Automatic white balance
- Metal lens holder with GND isolation
- Built in AGC
- Vandal-proof stamped metal housing
- IP 68 certified waterproof
- Full 90 degree angle adjustment
- Ultra wide lens

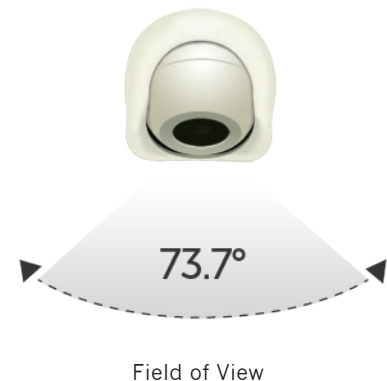

### CAMERA PLACEMENT

Recommended camera placement and field of view:

